



### LAMP CP22

COMPACT, HIGH EFFICIENCY ENCLOSURE LAMP

Fitted with Schuko socket and switch, it can be mounted with clips on DIN rail, on a bracket (ALFASTAFF) with screws or with magnetic fixing.

It fits exactly one 19" height/unit (44 mm).



Features	Unit	LAMP CP22	LAMP SP22
Power supply	V/Hz	230/50	230/50
Schuko socket	-	Yes 6A	No
Luminosity	Lm	900	
Lamp type	-	high efficiency fluorescent lamp	
Power consumption	W	11	
Service life	hrs	5000	
Switch	-	On/Off for the lamp only	
Connection	-	3-pole terminal for 1.5 mm <sup>2</sup> wire	
Casing	-	Aluminium profile and ABS, UL94 V0, light grey	
Protection degree EN60529	-	IP20	
Protection class	-	Class I, earthed	
Operating temperature	°C(°F)	-20/+50 (-4/+122)	
Storage temperature	°C(°F)	-45/+80 (-49/+176)	
Mounting	-	Clip on DIN rail, magnet or bracket, see ordering code below	
Installation position	-	variable	
Dimensions HxWxD	mm	95x43x268	
Weight	kg	0.76	
Package dimensions HxWxD	mm	105x58x310	
Conformity	-	CE	




#### Versions

Clip mounting on DIN rail	LAMP CP22+CLIP	LAMP SP22+CLIP
Magnet mounting	LAMP CP22+MAGN	LAMP SP22+MAGN
Bracket mounting	LAMP CP22+STAF	LAMP SP22+STAF

#### Accessories

Bracket for lamp	ALFASTAFF	ALFASTAFF
Magnet for lamp	ALFAMAGNETE	ALFAMAGNETE
Door limit switch without block	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA

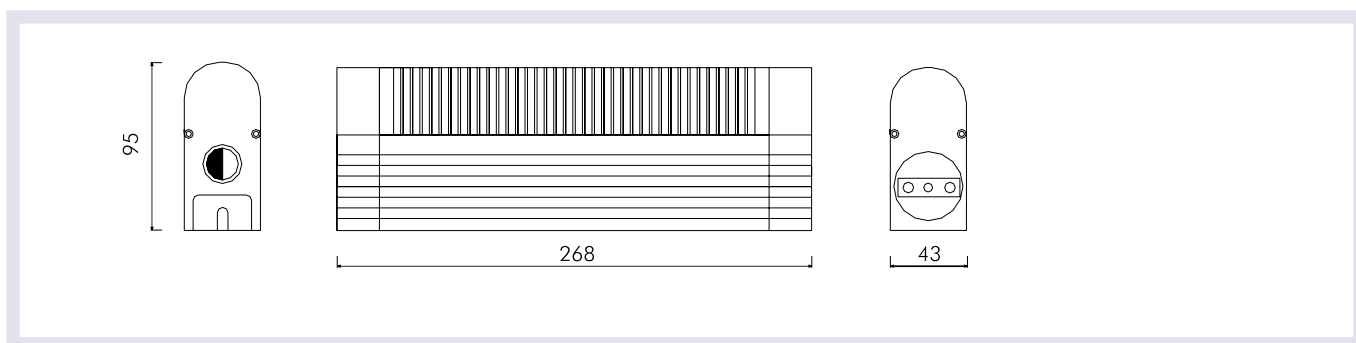



## LAMP 36

### SLIM ENCLOSURE LAMP



Slim and versatile fluorescent lamp. More units can be connected together in a chain up to a total power of 100W, by using the addition interconnection cable including in the packaging.



Features	Unit	LAMP3604	LAMP3605	LAMP3606	LAMP3607
Power supply	V/Hz	230/50			
Lamp type	-	T5 fluorescent lamp with integrated electronic ballast			
Power consumption	W	6	8	13	21
Service life	hrs	5000			
Connection	-	Plug-in cable 1.8 m long inside the package			
Series of lamps	-	Possible with male/male extension cable, max 100W total series			
Casing	-	Plastic, white			
Protection degree/class	-	IP20/Class II			
Operating temperature	°C(°F)	-20/+50 (-4/+122)			
Storage temperature	°C(°F)	-45/+80 (-49/+176)			
Mounting	-	Screws, hidden behind the lamp			
Dimensions HxWxD	mm	270x44x22	345x44x22	570x44x22	910x44x22
Weight	kg	0.33	0.36	0.50	0.53
Conformity	-	CE			

#### Accessories

Door limit switch without block	FINCOR	FINCOR	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA	FSLA	FSLA

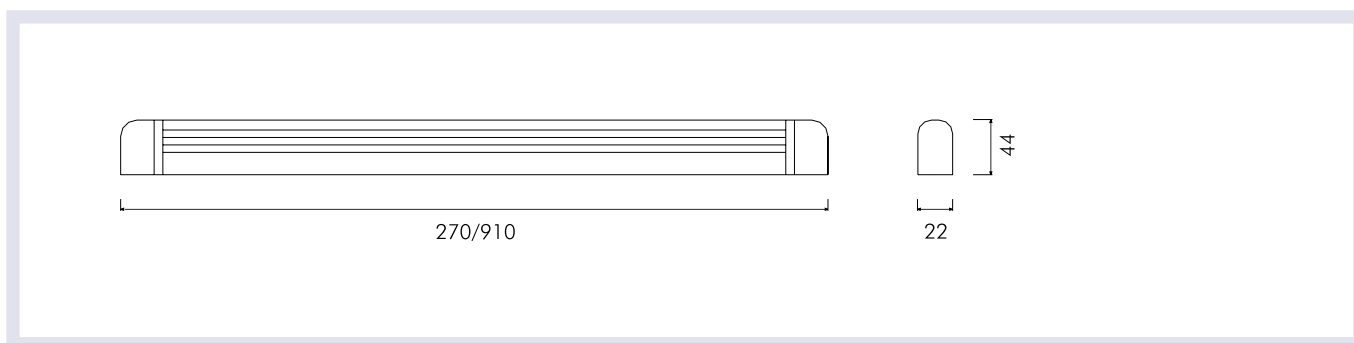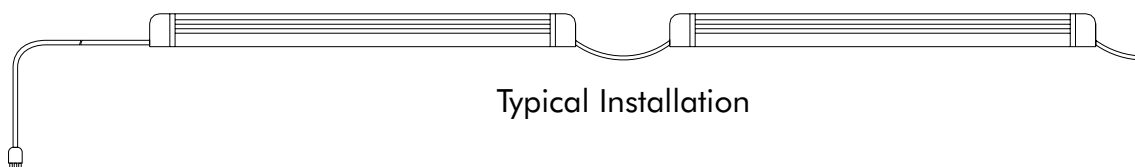



## LAMP 3012

ENCLOSURE LAMP



Features	Unit	LAMP3012-10W	LAMP3012-15W	LAMP3012-18W
Power supply	V/Hz	230/50		
Lamp type	-	T8 fluorescent lamp with integrated electronic ballast		
Power consumption	W	10	15	18
Service life	hrs	5000		
Connection	-	3-pole terminal for 2.5 mm <sup>2</sup> wire		
Casing	-	Plastic, white		
Protection degree/class	-	IP20/Class I, earthed		
Operating temperature	°C(°F)	-20/+50 (-4/+122)		
Storage temperature	°C(°F)	-45/+80 (-49/+176)		
Mounting	-	Screws, hidden behind the lamp		
Dimensions HxWxD	mm	390x62x35	490x62x35	645x62x35
Weight	kg	0.45	0.7	0.85
Conformity	-	CE		

### Accessories

Door limit switch without block	FINCOR	FINCOR	FINCOR
Door limit switch	FINRIP	FINRIP	FINRIP
Safety flashing device with lamp switch	FSL	FSL	FSL
Safety flashing device with lamp and auxiliary switches	FSLA	FSLA	FSLA

