ComAnt® Communications Antennas

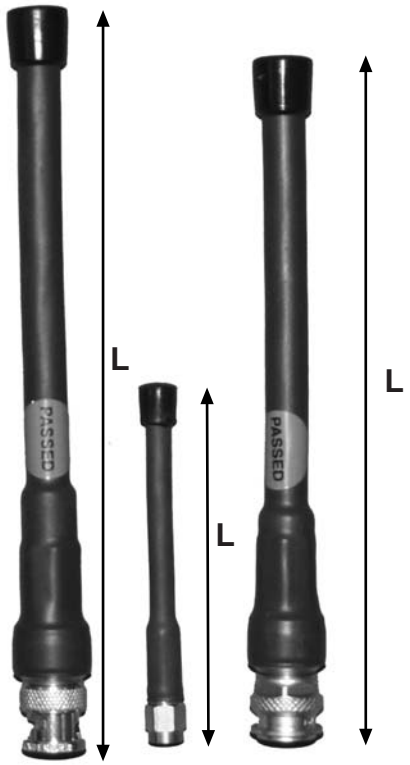

FREQUENCY INDEPENDENT DATA

Description:	quarter wave whip, sleeve feed for proper matching with small sized radios
Frequency:	370-390 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 890-960 MHz
Impedance:	50 ohm
Gain:	2 dBi
Polarization:	vertical
Connector:	BNC-male/SMA-male/TNC-male
VSWR:	< 1.5
Radome:	PE, heat shrink adhesive tubing
Radiator:	copper
Attachment:	directly to terminal
Temperature:	-40° - +80°C
IP:	62

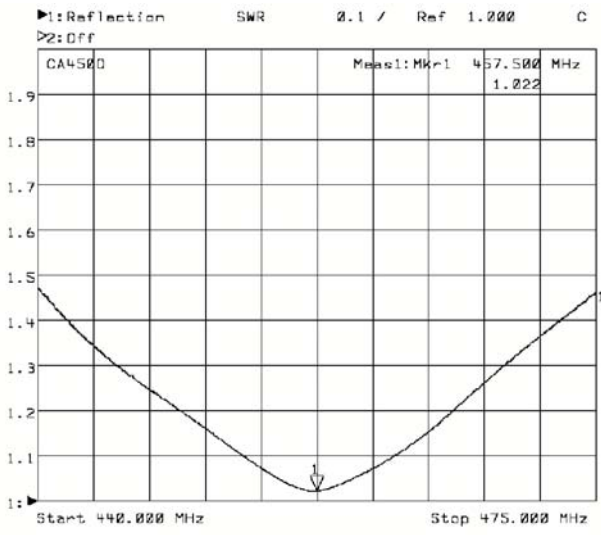

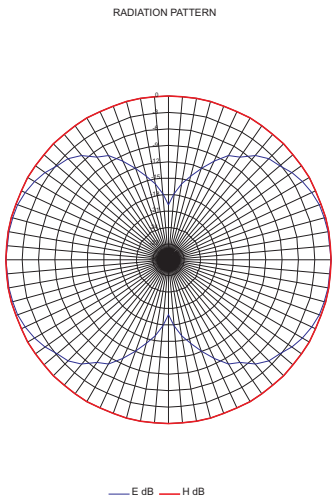

CAQ QUARTER WAVE WHIP

CompleTech
ComAnt® -antennas by CompleTech, Finland