


# LOW ENCLOSURE FOR WALL MOUNTING

**SERIES**  
**301**  
**LOW**

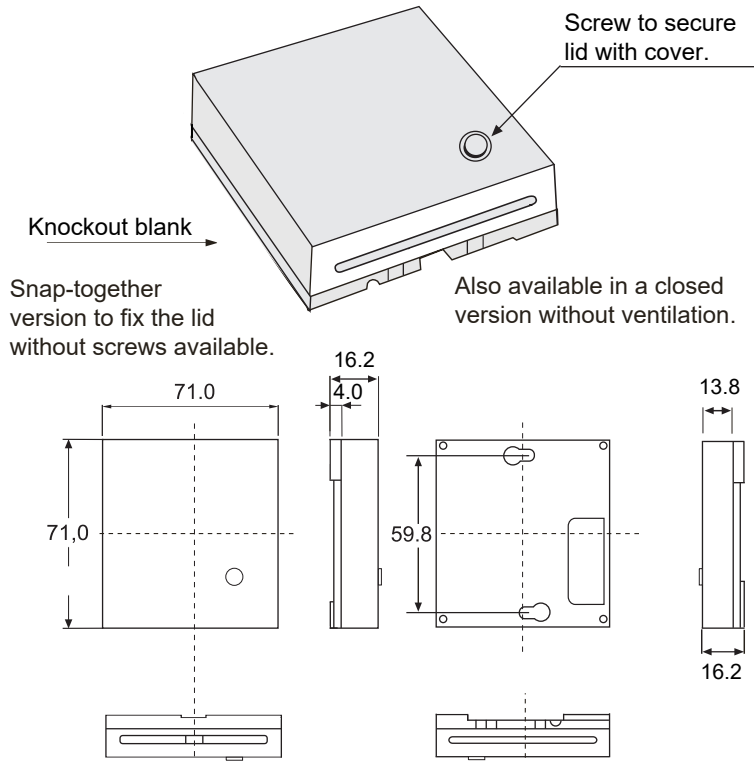

Low enclosure for wall mounting. Suitable for Sensors etc. Possibility for 2 PCB's. Standard colour is white/white, but other colours can be supplied upon request.

PCB and packing are available.

## TECHNICAL DATA


**Top part:** Cycoloy C 2800  
**Base part:** Cycoloy C 2800  
**Colour:** White/White  
 (RAL 9010/RAL 9010)  
**Temperature range:** -30 to +100°C  
**Self-extinguishing:** Acc. to UL94-V0

Base part with battery holder for 2 pcs AAA-batteries available.



TYPE 301 Low	ORDER CODE:
Complete: Top, base, 1 screw	p/n 0669787302
+bushing + 2 blind covers	
Packing	p/n 2068300004
Raw PCB	p/n 4999000300
Push button switch	p/n 4955127313

Possibility for integrated battery holder for wireless applications.

## PCB DIMENSIONS

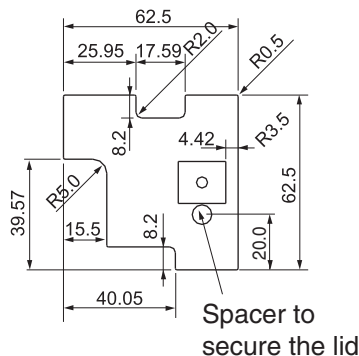

# LIGHT CONDUCTOR for 300, 301, 600, 601 and 602



Can be used with SMD or leaded Ø3 mm LED's. Material: Clear PC

LIGHT CONDUCTOR	ORDER CODE:
For 300, 301, 600 and 601	p/n 4972001258
For 602	p/n 4972001257

