


IS-DF306P Series

6-port 10/100Mb unmanaged Layer 2 Industrial PoE Switch



The IS-DF306P Series 10/100Mb unmanaged 6-port Ethernet Switches with 4 IEEE 802.3af/at PoE ports provide easy to use and plug-n-play applications. The cost effective IS-DF306P Series unmanaged switches can provide power and transmit data directly through a single Ethernet cable, which can be ideal for factory production line or embedded into machine system. The IS-DF306P Series switches are especially suitable for CCTV, Factory automation, and building automation applications.

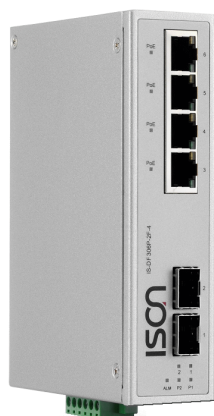

Key features

- ▶ 4 10/100 Copper ports with 2 100 SFP ports
- ▶ Support up to 4 IEEE 802.3af/at ports (15.4/30Watt)
- ▶ IEEE 802.3x flow control & back-pressure
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Fan-Less design with wide-temperature range (-40~75°C)
- ▶ Redundant power input (46~57 VDC) & Reserve power protection
- ▶ Support Din-Rail or wall mount installation
- ▶ Support Relay Output Alarm
- ▶ IP 30 Protection

Specification

Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	1K
Packet Buffer	1Mbits
Backplane / Switching Fabric	1.2Gbps

RJ45 Copper ports

Speed	10/100 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100 Mbps speed auto-negotiation; Full & Half Duplex

Fiber Ports

Port Types supported	100 Base SFP Slot
Fiber port connector	LC/RJ45 connector for fiber ports
Optimal fiber cable	Typical 50 or 62.5/125 μm for multimode (mm) Typical 8 or 9/125 μm for single mode (sm)

Protocols & Standards

IEEE 802.3 , IEEE 802.3x, Flow Control, Back Pressure, TCP/UDP, IEEE802.3af/at
--

Power

Power Input	Redundant Power Input, DC Input, Terminal Block
Input Voltage Range	46-57 VDC *12/24 VDC power input or 60W Ultra PoE output version are also available, please contact sales for the detailed.
Reverse power protection	YES
Power Consumption	IS-DF306P-F-4, 5.76W IS-DF306P-2F-4,6 Watt PSE: Max. 4 x 30W, 120 Watt total power budget

Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed


Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	>25 years

Mechanical

Protection	IP30
Dimension	142mmx43mmx105mm (LxWxD)
Weight	295 g
Installation	DIN-Rail mounting; Wall mounting
Relay Output	1A, 24V, Normal Open

Dimension Diagram

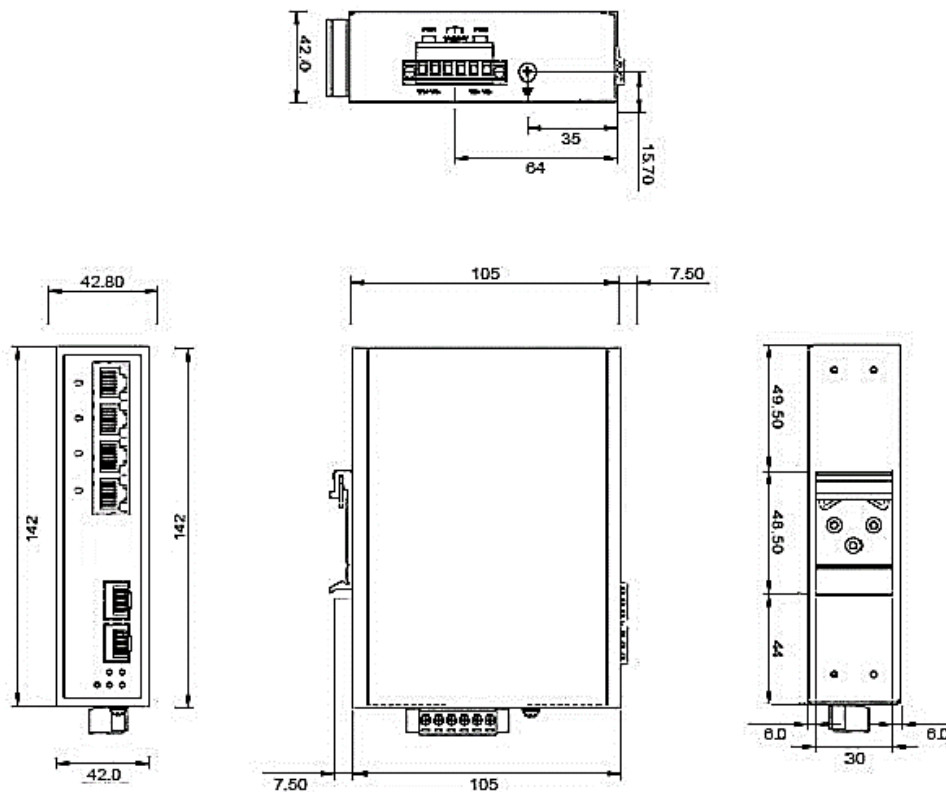

Ordering Information

Available Models	Description	10/100Mb TX	100 Mb FX
IS-DF306P-2F-4	Industrial 6 port 10/100 Mb Layer 2 unmanaged Ethernet Switch, with 2 100 SFP Slot, 4 PoE af/at	4	2

*12/24 VDC power input or 60Watt Ultra PoE output is also available, please contact sales for the detailed.

Accessories

1. 100 Mb SFP Modules
2. IS-RK2U 19" rack mount kit
3. IS-RK4U 19" rack mount kit

Package Checklist

- IS-DF306P Switch
- Quick Installation Guide (Printed)
- Wall Mount kit /Din-Rail kit