


IS-DG102P-1-60-A Series

Rugged Industrial AC Power input Gigabit Layer 2 Ultra PoE Injector



The IS-DG102P-1-60A Series are rugged designed, high power, Gigabit Ethernet industrial PoE Injector which meet IEEE 802.3af/at standard with 15.4/30/36 Watts power output and up to 60 Watts high power output. These models are especially good for your security system application. The special cold design technology will not only power up your PD device, but also reduce the excessive heat problem to a minimum. The IS-DG102P-1-60-A Series accept the input voltage from 100 to 240 VAC and have been rigorously tested for your Security, Transportation and all the other Industrial applications.

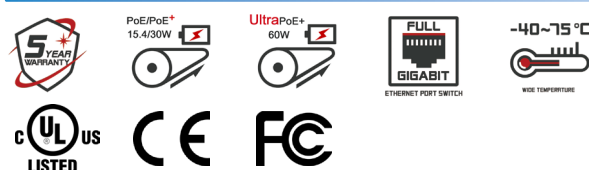

Key features

- ▶ 1 Giga TX and 1 Giga Ultra PoE port, (IEEE 802.3af/at, Ultra PoE)
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Support up to 15.4/30/36 Watts PoE/PoE+
- ▶ Rugged Fan-less Design, compact enclosure
- ▶ Overload current protection
- ▶ Power Input 100/240 VAC, 50Hz ~ 60Hz
- ▶ Provides increased noise immunity
- ▶ -40°C to 75°C operating temperature
- ▶ IP 30 Protection
- ▶ 2KV surge immunity on RJ45 Copper port
- ▶ 1.5KV Hipot

Specification

RJ45 Copper ports

Speed	10/100/1000 Mbps
-------	------------------

PoE Ports

Output Power	IEEE 802.3af/at, 15.4/30/36/60 Watts output
--------------	---

Power

Power Input	AC Power Input, IEC Connector
Input Voltage Range	100/240 VAC, 50Hz~60Hz
Power Consumption	IS-DG102P-1-60-A, Max 1.5 Watt (Without PoE output)

Indicators

Power status indication	Power Input status
PoE port indication	PoE Light (Blue)


Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE, UL 60950-1, CSA C22.2 No. 60950-1, EN 60950-1
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3), IEC-61000-6-2, -4
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	>220,000 hours

Mechanical

Protection	IP30
Dimension	80mm x 156mm x 96.6mm (LxWxD)
Weight	800g
Installation	DIN-Rail mounting; Wall mounting

Dimension Diagram

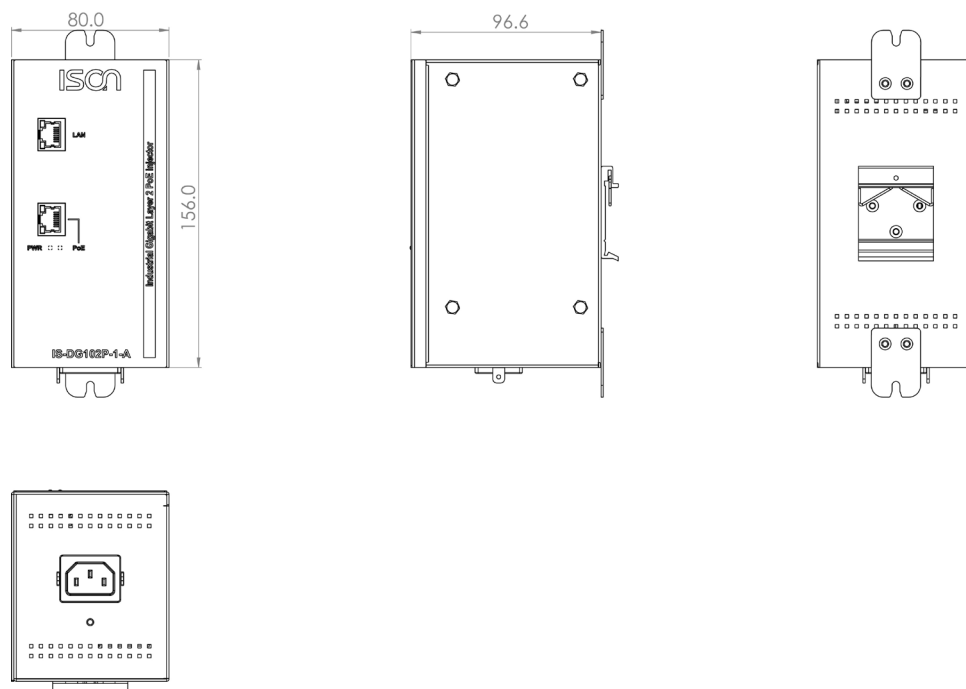

Ordering Information

Available Models	Description	10/100/1000Mb TX	100/1000Mb Ultra PoE
IS-DG102P-1-60-A	Industrial 2 port Gigabit Layer 2 PoE/PoE+ injector, Single AC Power input, 100/240 VAC, 50Hz~60Hz, 15.4/30/36/60 Watts, -40~75°C	1	1

Accessories

N/A

Package Checklist

- IS-DG102P-1-60-A PoE Injector
- Quick Installation Guide (Printed)
- Wall mount kit /Din-Rail kit