

# IS-DG208 Series

## 8-port Gigabit Unmanaged Layer 2 Industrial Ethernet Switch



The IS-DG208 Series are full Gigabit unmanaged Ethernet Switches that provide easy to access, plug-n-play Gigabit ports for applications; a full Gigabit network provides higher throughput than legacy Fast Ethernet network. The cost effective IS-DG208 Series unmanaged switches can be easily used in factory production line or embedded into machine system. Easy to use, plug&play.



### Key features

- ▶ 8 / 6 Giga Copper ports with 0 / 2 100/1000 SFP ports.
- ▶ Support 9K Jumbo frames
- ▶ IEEE 802.3x flow control & back-pressure
- ▶ Layer 2 Line-Speed Switching Fabric, non-blocking
- ▶ Fan-Less design with wide-temperature range (-40~75°C)
- ▶ Redundant power input 12~58 VDC
- ▶ Reverse power protection
- ▶ Support Din-Rail or wall mount installation
- ▶ IP 30 Protection
- ▶ Compact size Design

### Specification

#### Ethernet

Operating Mode	Store and Forward, L2 wire-speed/non-blocking switching engine
MAC addresses	8K
Packet Buffer	4 Mbits
Jumbo frame	9K
Backplane / Switching Fabric	16Gbps

#### RJ45 Copper ports

Speed	10/100/1000 Mbps
MDI/MDIX Auto-crossover	Support straight or cross wired cables
Auto-negotiation/Duplex	10/100/1000 Mbps speed auto-negotiation; Full & Half Duplex

#### Fiber Ports

Port Types supported	100/1000 Base SFP Slot
Fiber port connector	LC/RJ45 connector for fiber ports
Optimal fiber cable	Typical 50 or 62.5/125 μm for multimode (mm) Typical 8 or 9/125 μm for single mode (sm)

#### Protocols & Standards

IEEE 802.3, IEEE 802.3x, Flow Control, Back Pressure, ICMP, TCP/UDP
---

#### Power

Power Input	Redundant Power Input, DC Input, 4 pin terminal Block
Input Voltage Range	12-58 VDC
Reverse power protection	YES
Power Consumption	IS-DG208 7 Watt, IS-DG208-2F 8 Watt

#### Indicators

Power status indication	Power Input status
Ethernet port indication	Link & speed


## Environmental and Compliances

Operating Temperature	-40~75°C (Cold startup at -40°C)
Storage Temperature	-40~85°C
Humidity	5~95% (Non-Condensing)
Vibration, shock, free fall	IEC-60068-2-6, -27, -32
Certification Compliance	CE, FCC
Electrical safety	CE
EMC	FCC Part 15, CISPR 22 (EN55022) Class A IEC-61000-4-2, -3, -4, -5, -6 (Level 3)
RoHS & WEEE	RoHS (Pb free) and WEEE Compliant
MTBF	>25 years

## Mechanical

Protection	IP30
Dimension	117.8mm(H) x 39mm (W) x 96.9mm (D) (without DIN rail clip)
Weight	365 g
Installation	DIN-Rail mounting; Wall mounting

## Dimension Diagram

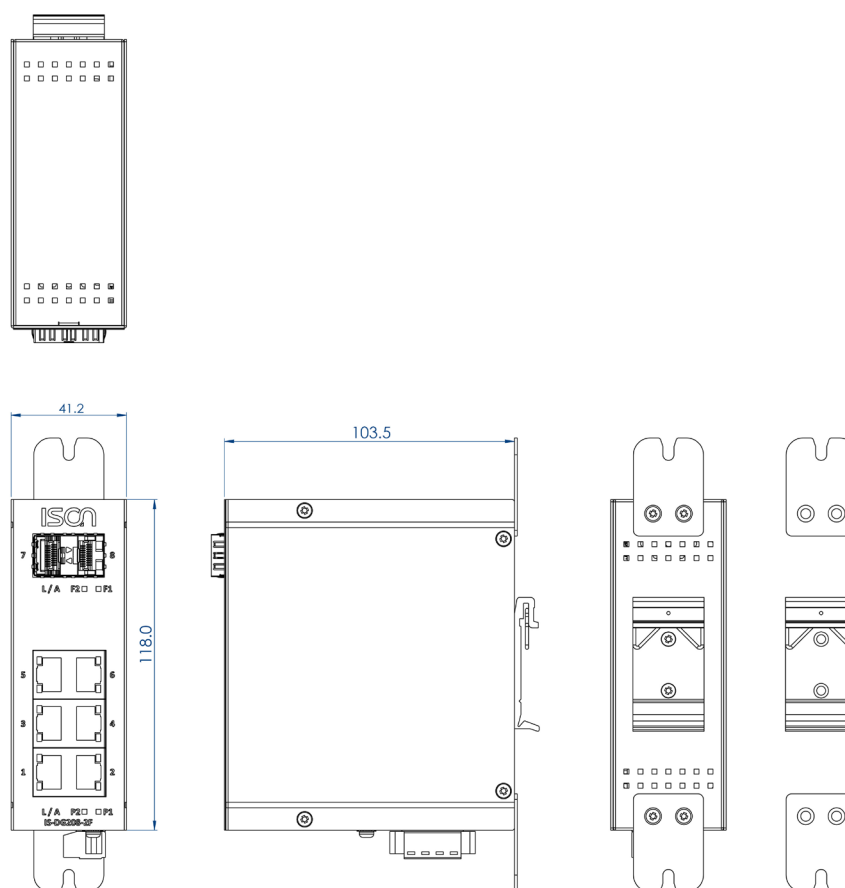

## Ordering Information

Available Models	Description	10/100/1000Mb TX	100/1000Mb FX
IS-DG208-2F	Industrial 8 port Gigabit Layer 2 unmanaged Ethernet Switch	6	2
IS-DG208	Industrial 8 port Gigabit Layer 2 unmanaged Ethernet Switch	8	

## Accessories

1. 100 Mb SFP Modules
2. Gigabit SFP Modules
3. IS-RK2U 19" rack mount kit
4. IS-RK4U 19" rack mount kit

## Package Checklist

- IS-DG208 Switch
- Quick Installation Guide (Printed)
- DIN-Rail kit
- Wall mount kit (Optional)